

Waterproof switches

INT-1108S Series 7.2×7.2mm, Ø3.4mm Stem, Surface mount type




- **Features** : IP67 dust & water resistance
- **Applications** : Home appliances or Industrial equipments used around water
- **Specifications** :

Rating	DC 12V 50mA
Contact resistance	100mΩ Max.
Travel (mm)	0.25±0.1

► Part list

Part No.	Length (mm)	Operating force	Life	QTY per pack (Tape & reel)			
INT-1108S43A	4.3	230±40gf	100,000 Cycles Min.	1K			
INT-1108S49A	4.98						
INT-1108S50A	5.1						
INT-1108S69A	6.9						
INT-1108S70A	7.1						
INT-1108S90A	9.0						
INT-1108S99A	9.9						
INT-1108S13A	13.0						
INT-1108S43B	4.3				250±70gf	100,000 Cycles Min.	1K
INT-1108S49B	4.98						
INT-1108S50B	5.1						
INT-1108S69B	6.9						
INT-1108S70B	7.1						
INT-1108S90B	9.0						
INT-1108S99B	9.9						
INT-1108S13B	13.0						

► Drawing

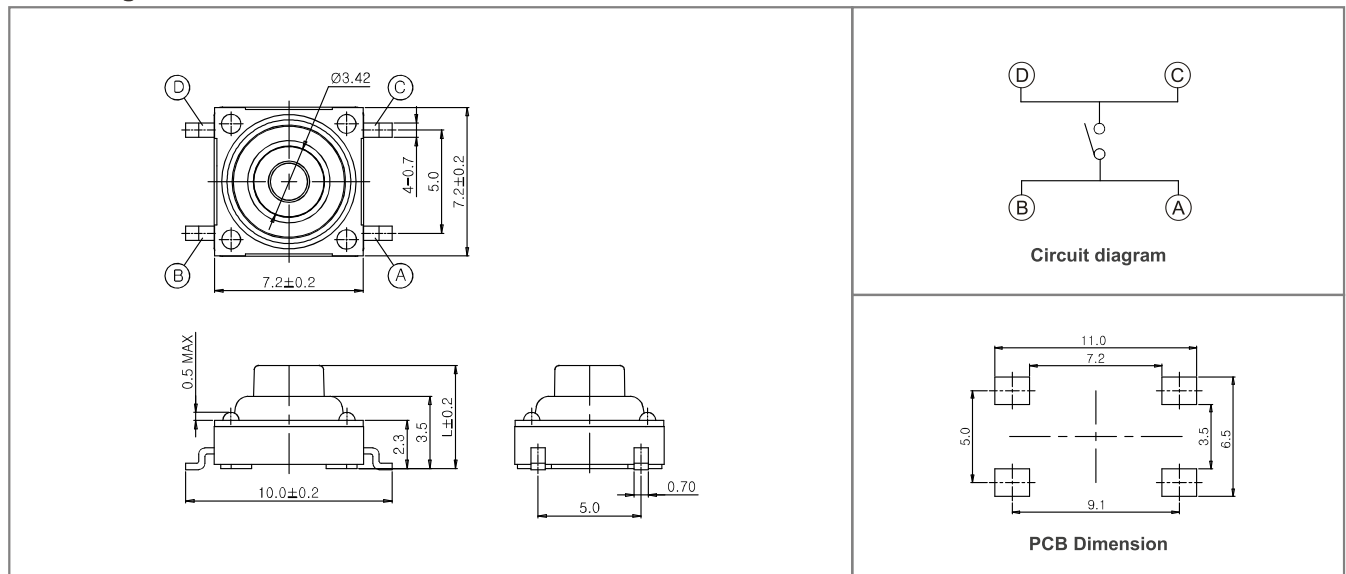

TACT
Switches
PUSH
Switches
HOOK
Switches
DETECTOR
Switches
SLIDE
Switches
ROTARY
Potentiometers
LEVER
Switches
ROTARY
Switches
CAPS