


Sealed SMT Tact switches

INT-1162V / INT-1162V2 Series

6.2×6.5mm, Sealed with Rubber stem, Surface mount type, Side push

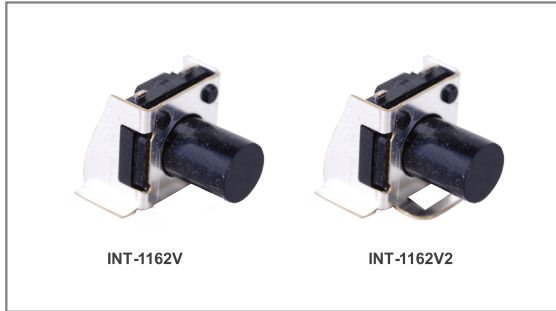

- ▶ **Features** : Rubber stem provides soft feeling
- ▶ **Applications** : PC & Peripherals, Car AV equipments, Automobile, Communications devices
- ▶ **Specifications** :

Rating	DC 12V 50mA
Contact resistance	100mΩ Max.
Travel (mm)	0.4+0.2/-0.1

▶ Part list

Part No.	Length (mm)	Operating force	Life	QTY per pack (Tape & reel)
INT-1162V15A	1.5	300±100gf	100,000 Cycles Min.	600
INT-1162V26A	2.6			
INT-1162V435A	4.35			
INT-1162V696A	6.96			
INT-1162V2 15A	1.5	300±100gf	100,000 Cycles Min.	550
INT-1162V2 26A	2.6			
INT-1162V2 435A	4.35			
INT-1162V2 696A	6.96			

▶ Drawing

<p>INT-1162V</p>		<p>Circuit diagram</p> <p>PCB Dimension</p>
<p>INT-1162V2</p>		<p>Circuit diagram</p> <p>PCB Dimension</p>